


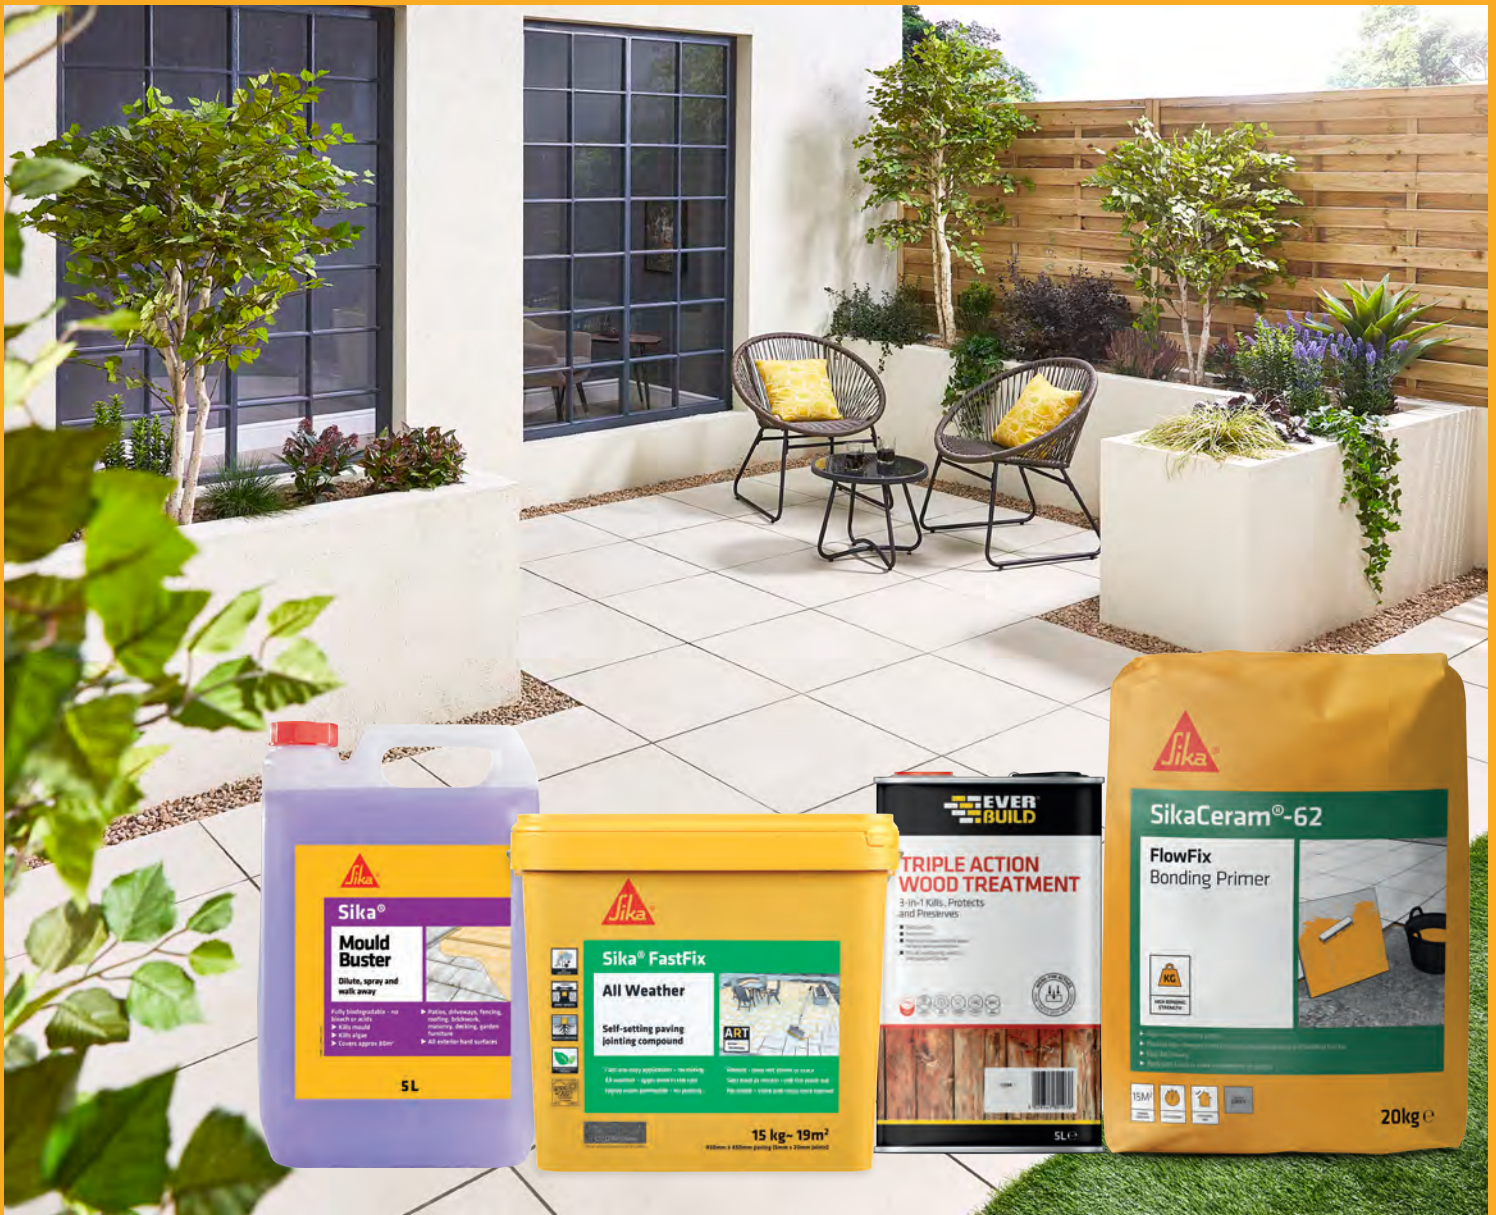

PRODUCT FOCUS

LANDSCAPING

SIKA® FASTFIX ALL WEATHER ALWAYS STRAIGHT TO THE POINT

Sika® FastFix All Weather is a self-setting paving jointing compound that provides the ideal solution to perfect pointing on paving, paths and patios.

With a unique formula containing Active Resin Technology for advanced durability it is ready to use with no mixing required, easy to apply in all weather conditions; even in the rain and won't shrink or crack over time.

Suitable for use on all joints from just 20mm deep, Sika® FastFix can be used for a range of applications including footpaths, stone setts, cobbles and Indian sandstone paving slabs. Once opened it can be stored in water and reused to reduce waste.



ART
Active Resin
Technology

UNIQUE FORMULA
CONTAINING **ACTIVE
RESIN TECHNOLOGY**
FOR ADVANCED
DURABILITY



**FOR ALL JOINTS FROM
JUST 20MM DEEP**



**EASY TO APPLY
- FAST TO SET**




**ACTS AS A NATURAL BARRIER
FOR WEED GROWTH**



**NO WASTE - STORE AND
REUSE ONCE OPENED**

NEW

NEW RANGE OF COLOURS

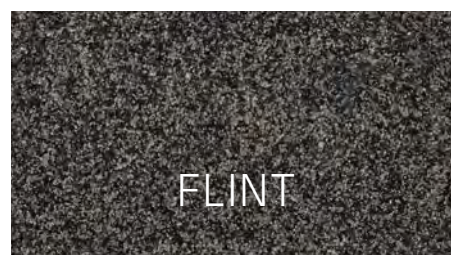

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
562467	14KG	GREY	1	5055492702234
562468	15KG	BUFF	1	5055492702241
626733	15KG	CHARCOAL	1	5055492703125
626734	15KG	FLINT	1	5055492703118
626320	15KG	STONE	1	5055492703101
562467	14KG	DEEP GREY	1	5055492703637
562468	15KG	DARK BUFF	1	5055492703644



SIKACERAM® FLOWFIX

SikaCeram® FlowFix is a high performance porcelain paving installation system, consisting of a bonding primer and jointing compound.


SikaCeram® FlowFix Bonding Primer is used to provide an exceptional bond between porcelain paving and the bedding mortar. Mixed solely with water, SikaCeram® FlowFix Bonding Primer is applied with a brush or roller to the rear of the paving when laying, to prevent the paving system breaking away from the mortar bed.

SikaCeram® FlowFix Jointing Compound is a controlled, cementitious flowable jointing grout which is applied by mixing with water on site. SikaCeram® FlowFix Jointing Compound is poured over joints with ease and worked into other exposed joints by squeegee. The surplus is simply washed off after 30 minutes. Once dry the surplus is simply washed off. SikaCeram® FlowFix Jointing Compound is a highly workable product that is non-permeable once cured.

SikaCeram®-62 FlowFix
Bonding Primer

GREY

SikaCeram®-621 FlowFix
Jointing Compound



SikaCeram®-62 FlowFix
Bonding Primer

COMING SOON

SGAN	SIZE	COLOUR	MERCHANT INFORMATION BOX QTY	BARCODE
633196	20KG	GREY	1	5055492703286

A high strength primer that's used to provide an exceptional bond between porcelain paving and bedding mortar. It's fast and easy to mix, applied by brush or roller to the underside of paving and fully cures in 72 hours.




SikaCeram®-621 FlowFix
Jointing Compound

COMING SOON

SGAN	SIZE	COLOUR	MERCHANT INFORMATION BOX QTY	BARCODE
633361	20KG	LIGHT GREY	1	5055492703255

A controlled, flowable porcelain grout, that's simply poured and squeegeed into paving joints, for a fast and effective application. Suitable for joints between 3-10mm wide and 20mm in depth, SikaCeram® FlowFix Jointing Compound cures in 60 minutes to a non-permeable finish.*



* Depending on site conditions

HOW TO APPLY

Bonding Primer



STAGE 1



Following the instructions, add water to the high strength SikaCeram® FlowFix Bonding Primer.

STAGE 2



Mix the primer in a tub until a smooth paste forms.

STAGE 3



Apply with a brush to the underside of the porcelain flags.

STAGE 4



Immediately after applying the primer, lay the paving flag onto the mortar bed.

STAGE 5



Tap down using a rubber mallet and check flag is level. Cure for up to 72 hours.

Jointing Compound



Following the instructions, prepare your substrate. Pre-wet the tiles but ensure there is no standing water.

STAGE 6



Mix SikaCeram® FlowFix Jointing Compound with water using the measurements given in the instructions.

STAGE 7



Using an electric mixer, mix until a smooth liquid forms. CAUTION: Adding too much water will cause the mixture to split and make it unusable.

STAGE 8



Once mixed correctly, pour the compound into the joints. Pour within 15 minutes of mixing.

STAGE 9



Use a squeegee to guide the jointing compound into exposed joints to obtain fill level.

STAGE 10



Ensure the product has sufficiently hardened before cleaning the surface of the flags with a sponge and bucket.

WOOD CARE

Wood is a key material used in many applications around our homes and gardens. Its versatility and appearance make it incredibly popular and ideal for use in a variety of applications, from fences and furniture, to floorboards and roof joists. However, left untreated, it's vulnerable to attack from rot, decay, fungus, wood boring insects and more.

The best protection against this is to treat the wood with an **HSE certified wood preserver**. It's important to look for the HSE number on the tin; as this confirms that the product has passed the rigorous approval criteria and is allowed to be classed as a true preserver – meaning it actively penetrates deeply into the wood to extend its lifespan and defend against rot and decay etc., unlike wood paints, protectors or coatings which simply act as a water-repellent.

Ideally, timber should be treated when it's first installed, and re-treated periodically to avoid costly repairs. However, general maintenance and plumbing work will often reveal floor boards or joists which have been exposed to leaks and developed fungal growth or rot. Builders will need to evidence that a certified treatment has been applied (by providing the HSE number from the tin) to combat the issue, so that any newly installed timber will not be cross-contaminated. Similarly, wood used externally such as fences and sheds are exposed to the elements and need protection. Many wooden fences are supplied "treated", meaning they've been pre-treated with a preservative to protect against the above problems. But, surprisingly, many sheds, summer houses etc., are made from untreated timber, which means they need protecting from fungal attack with a certified preserver, but they also require a waterproof top-coat to protect from the weather (e.g. paint or varnish).

Fortunately Everbuild have taken care of with a range of wood care products for every condition.



Everbuild Triple Action Wood Treatment

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
483185	5LTR	CLEAR	5	5029347801038

Acting as both prevention and cure in one tin; Triple Action Wood Treatment contains 3 active ingredients that:

- **Kill** wood boring insects, and stop wet rot and dry rot.
- **Protect** timber against wet rot, dry rot, staining, fungi and wood boring insects.
- **Preserve** and enhance the life span of timber

HSE Certified, Triple Action Wood Treatment can be used on most exterior and interior wood and joinery which is out of ground contact such as doors; furniture, window frames, fences, sheds, joists, floorboards, garden furniture, rafters etc. They can be over painted, stained or varnished when dry.

Everbuild Wood Preserver

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
482977	5LTR	CLEAR	4	5029347802035

Actively penetrates the wood to give long lasting protection from damage caused by wet rot, dry rot, decay and fungi. Plus, the use of ultra lightfast pigments on the coloured variants in the Everbuild range, give a visibly deep and vibrant finish. They're also HSE Certified, fast drying and non-flammable; and can even be applied to wet timbers!

Everbuild Woodworm Killer

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
483790	5LTR	CLEAR	4	5029347610975

A ready to use treatment that actively kills and protects against re-infestation of all types and life stages of wood boring insects and their larvae; specifically woodworm. Plus it's HSE Certified, fast drying, non-flammable, solvent free and low odour!

PAVING AND SURFACE SEALERS

Paving can be expensive and a big investment but can quickly be ruined by spillages, weathering, staining and other day to day activities.

The most popular types of paving are natural stone, block paving and concrete, all of which are porous and prone to staining and weathering.

To prevent imperfections, paving needs to be sealed using an appropriate sealer for the paving type. This will protect and keep the paving in the best condition.

402 Water Seal Water Repellent

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
488954	5LTR	-	4	5029347004255

A high performance transparent water repellent specially formulated to prevent water penetration on all mineral substrates such as brick, stone, masonry, pebble dashed and rendering. Waterseal is water based and not harmful to the user or the environment, and it's non-flammable.



405 Path & Patio Seal Paving Sealer

SGAN	SIZE	COLOUR	BOX QTY	BARCODE
482656	5LTR	-	4	5029347000653

An acrylic coating used to seal and protect patios, paths, natural stone, concrete and block paving from the effects of water, petrol and fungal/green growth. The milky solution dries to a clear hard-wearing, water repellent film giving a low sheen slip resistant finish.



Sika Patio Seal Paving Sealer

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
115338	5LTR	CLEAR	4	5055047206354


A low-odour, water-based, acrylic coating that is ideal for sealing and protecting patios, paths, natural stone, concrete and block paving. Sika® Patio Seal protects against the effects of water, petrol and organic growth. The product dries to a hard-wearing, water repellent film which gives a slip-resistant finish.



Sika® Water Repel+ Water Repellent & Protector

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
407296	5LTR	-	4	5055047210986


A solvent-free, water repellent and protector for brick, stone and masonry. Sika® Water Repel+ protects against rainwater penetration without changing the aesthetic appearance of the substrate.



Sikagard 700 S Siloxane Based Water Repellent

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
100861	5LTR	CLEAR	1	5604672000211
100862	25LTR	CLEAR	1	5604672000365

A one part solvent based water repellent impregnation for absorbent cementitious substrates. It penetrates well into the open pores of the substrate, providing durable water repellency, while still allowing water vapour diffusion in both directions.



SURFACE

401 Brick & Patio Cleaner

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
484097	5LTR	-	4	5029347004156

A fast acting acid based formula (9.5% strength) that dissolves mortar and cement stains and ingrained dirt and paint on most mineral surfaces such as brick, concrete, paving flags and earthenware.



403 Concrete Hardener & Dustproof

MERCHANT INFORMATION				
CODE	SIZE	COLOUR	BOX QTY	BARCODE
488957	5LTR	-	4	5029347004354

Formulated from high quality silicate resins to both harden and dustproof new and old concrete floors for both internal and external use. It reacts chemically with the lime content of concrete to form a hard-wearing surface. CE Marked. **Tested to BSEN1504-2.**



406 Stabilising Solution

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
483195	5LTR	-	4	5029347601508

A microscopically fine polymer emulsion which penetrates dusty/chalky and badly weathered surfaces to leave a stable sound base for decoration with paint, wallpaper, tiling etc. Suitable for both interior and exterior use.



407 Mortar Stain Remover

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
488959	5LTR	-	4	5029347040758

A highly concentrated fast acting acid based formula (18% strength) which dissolves mortar and cement stains, ingrained dirt and most paints on mineral surfaces such as brick, render and concrete.



Patio Wizard Mould & Algae Treatment

MERCHANT INFORMATION				
SCAN	SIZE	COLOUR	BOX QTY	BARCODE
484818	5LTR	-	4	5029347606312

Patio Wizard kills algae, green growth, mould and fungi on patios, paths, driveways and all hard surfaces. It is so easy to use, just apply and leave to dry, no need for any washing off, scrubbing or pressure washing. Supplied as a concentrate that dilutes with water at 1:10 i.e. 5L makes 50L and 1L makes 10L.



Everbuild 901 Black Bitumen Paint Black Bitumen Paint for Metal Protection

MERCHANT INFORMATION				
SGAN	SIZE	COLOUR	BOX QTY	BARCODE
486939	5LTR	BLACK	4	5029347009151
486951	25LTR	BLACK	1	5029347009137
486938	2.5LTR	BLACK	6	5029347009120

A solvent based, full bodied black bituminous paint. When dry, the product forms an odourless and taint free black film suitable for metal protection, concrete structures and overcoating wood and felt.




TREATMENTS

Sika® Mould Buster Mould & Algae Treatment

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
174996	5LTR	-	4	5055047209096


A powerful, fast acting solution which is effective on most surfaces. Sika® MouldBuster removes algae, mould and green growth without the need for scrubbing or pressure washing.



Sika® Brick & Patio Cleaner

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
102476	5LTR	-	4	5055047200581


A fast acting, acid based cleaning solution for brickwork, concrete and paving. Sika® Brick & Patio Cleaner contains a powerful formula that dissolves mortar and cement stains, ingrained dirt, efflorescence on mineral surfaces.



Sikagard® -112 Mortar & Brick Cleaner

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
649545	5LTR	-	4	5055047209850


A fast acting acid based solution that removes concrete spills, waste and mortar. It provides an excellent solution for cleaning brickwork and tools easily along with removing hard to tackle limescale.



Sika® Dustproofer Concrete Surface Hardener

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
102470	5LTR	-	4	5055047200611


A economic, ready to use dustproofer and concrete surface hardener for concrete floors, paths and driveways. Sika® Dustproofer is suitable for hardening and dustproofing both old and new concrete. CE Marked.



Tarmac Restorer High Performance Surface Coating

CODE	SIZE	COLOUR	BOX QTY	BARCODE
488956	5LTR	BLACK	4	5029347612856


A high performance surface coating specially formulated to make tired old tarmac look just like new. Tarmac Restorer provides a tough, durable, low sheen finish which protects from weathering, oil and petrol spills and unsightly plant and weed growth. Tarmac restorer is easy to apply, provides long term protection, reduces further tarmac repair needs and restores the deep, black finish of your tarmac. As it is quick drying, driveways can be used after only 4 hours of the product being applied.



Everbuild Quick Mac Tarmacadam Repair Compound

SGAN	SIZE	COLOUR	MERCHANT INFORMATION	
			BOX QTY	BARCODE
489024	25KG	BLACK	1	5029347603144

A high specification Tarmacadam repair compound designed to repair roads, drives and footpaths. May also be used for repairs around roadside ironwork. Ready-to-use cold lay product, maximum 6mm chip size for permanent compaction and instantly trafficable.





SETTING SAND

A easy to use, moisture curing jointing compound for narrow joints. Sika® Setting Sand can be simply poured or swept into joints before being saturated with water. Provides perfect pointing for all types of block paving; once cured, it will not wash out, shrink or crack over time.


Sika® Setting Sand Narrow Paving Joint Filler

SCAN	SIZE	COLOUR	MERCHANT INFORMATION	
442722	20KG	BUFF	BOX QTY	BARCODE
			1	5055492700223

A moisture-curing jointing compound for narrow joints. Faster than traditional methods, it can be simply poured or swept into joints before being saturated with water giving perfect pointing for all types of block paving.




STAGE 1

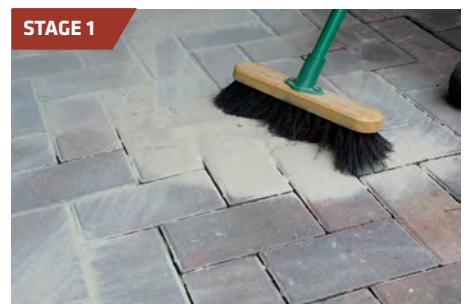

STAGE 2



STAGE 3

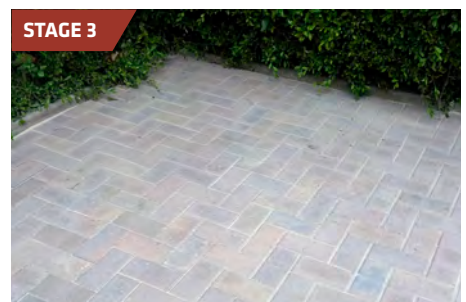

SIKA IRELAND LIMITED
Sika House
Ballymun Industrial Estate
Dublin 11
D11 DA2V
Ireland

Contact
Phone +353 1 862 0709
Fax +353 1 862 0707
E-Mail info@ie.sika.com
www.sika.ie
@Sikalreland

BUILDING TRUST

